



# HOT MAX-S

## HMB HOT AC 75

Mibrasa oven with heated holding drawers and top heated cupboard



### TECHNICAL INFORMATION

Item	HMB HOT AC 75
Fire up time <sup>1</sup>	45 min
Cooking temperature	482 -662 °F / 250 - 350 °C
Initial charcoal load <sup>1</sup>	22 lb / 10 kg
Production*	154 lb/h / 70 kg/h
Charcoal load duration <sup>2</sup>	7 h
Equivalent power*	4.6 hp / 3,5 kW
Exhaust rate	1648 cfm / 2800 m <sup>3</sup> /h
Net weight <sup>3</sup>	1389 lb / 630 kg
Crated weight	1676 lb / 760 kg
Crate dimensions (WxDxH)	1) 35.4 x 31.5 x 53.2 in / 900 x 800 x 1350 mm 2) 35.4 x 39.4 x 80.7 in / 900 x 1000 x 2050 mm

\*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

### FEATURES

OUR CHARCOAL OVENS WITH  HEATED HOLDING DRAWERS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.


The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

With the HOT series take full control by optimizing the residual-heat from the Mibrasa® oven to hold ingredients in three temperature zones on the unit. The seamless lineal design makes the Mibrasa® HOT the most comprehensive charcoal oven station for any chef that prioritizes an effective and cost-efficient kitchen.

### PAX PER SERVICE\*



### GRILL DIMENSIONS



### INCLUDED ACCESSORIES



- Grill [2] [GT75]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Firebreak-dissipating filter [FB-DF]
- Ember poker [PK75]
- Grill brush [CEP]
- Heating rack top cabinet [SBAC] Gastronorms [1x GN1/2, 1x GN1/1]

### RECOMMENDED ACCESSORIES

- Casters [WINOX]
- Removable grease collector [REG1P/2]
- Consult catalogue for kitchenware and grillware

### QUALITY GUARANTEE

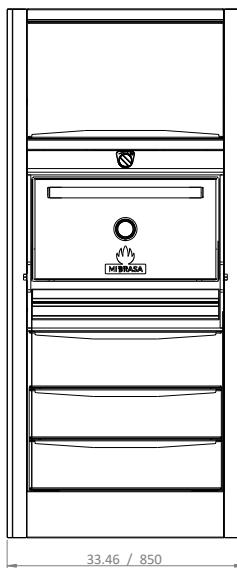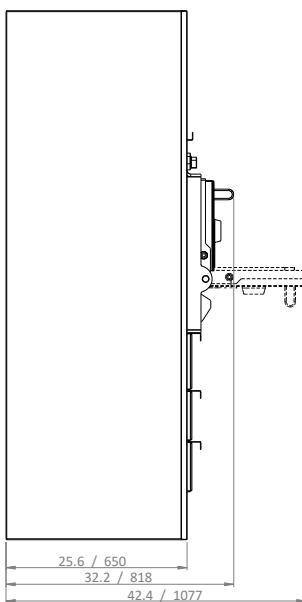


**Front view**

**Side view**


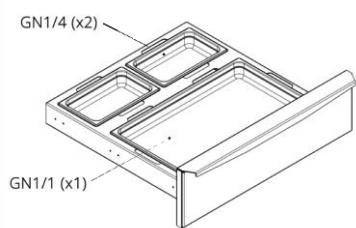
Dimensions in in / mm

Revit drawings available on request at [usa@mibrasa.com](mailto:usa@mibrasa.com)

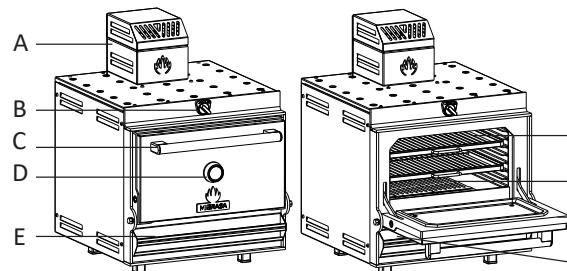
Total height option 2: 84.3 in / 2141 mm



A	Firebreak-dissipating filter
B	Upper damper
C	Door handle
D	Thermometer
E	Lower damper/ash collector
F	Cooking grills
G	Charcoal grids
H	Door
I	Grease collector

**GASTRONORM CAPACITY**
**HOT DRAWER (x3)**


Residual temperatures of the drawers between 131 °F / 55 °C and 194 °F / 90 °C based on oven working at 572°F / 300°C. Maximum gastronorm height 2.36 in / 6 cm.

**Compatible with Mibrasa GN**
**HEATING RACK (x2)**


Residual temperatures of the heating rack in the top cabinet approximately 302 °F / 150 °C, based on the oven working at 572 °F / 300 °C

**CUSTOMIZE**
**DOOR COLOR**


BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

**EDITION**


GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD\*

The Edition finishes are applied to the logos, door handle and the thermometer casing.  
\*Only on the door handle (logos and thermometer casing in silver)

**INSTALLATION GUIDELINES AND SAFETY STANDARDS**

Clearances to construction / other appliances from oven	3 in / 76 mm
Clearances of flammable materials from oven	12 in / 300 mm
Clearance of workspace from front of the oven	44 in / 1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet.  
Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.