



VERTICAL-M

Mibrasa oven with lower heated cabinet



TECHNICAL INFORMATION

| | |
|-------------------------------------|------------------------|
| Reference | HMB AB 110 |
| Fire up time ¹ | 45 min |
| Cooking temperature | 250 - 350 °C |
| Initial charcoal load ¹ | 15 kg |
| Production* | 100 kg/h |
| Charcoal load duration ² | 8 h |
| Equivalent power* | 5 kW |
| Exhaust rate | 3200 m ³ /h |
| Net weight ³ | 493 kg |
| Crated weight ³ | 570 kg |
| Crate dimensions (WxDxH) | 1100 x 1100 x 1900 mm |

*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

FEATURES

OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.

THE VERSATILITY OF MIBRASA® CHARCOAL OVENS


We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

PAX PER SERVICE*



110-130

GRILL DIMENSION

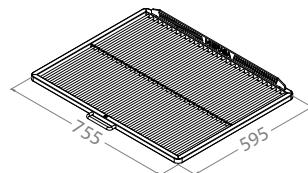

INCLUDED ACCESSORIES


- Firebreak-dissipating filter [FB-DF]
- Grill [GT110]
- Mibrasa tongs [TG]
- Poker [PK110]
- Grill brush [CEP]
- Ash shovel [PALA]

RECOMMENDED ACCESSORIES


- Extra grill [GT110]
- Removable grease collector [REG3/4]
- Gastornorm rack [SGNAB]
- Consult catalogue for kitchenware and grillware

QUALITY GUARANTEE

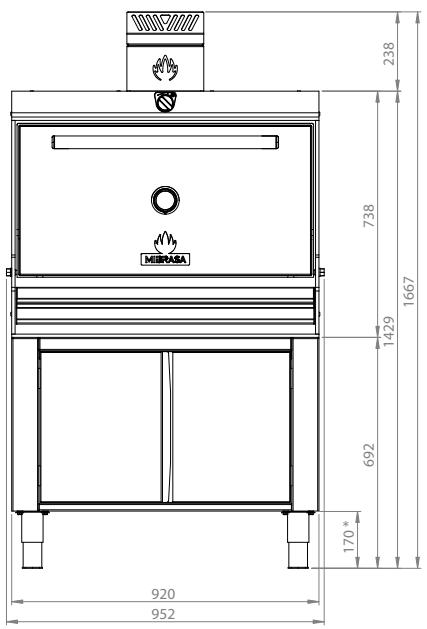


Front view


Dimensions in mm

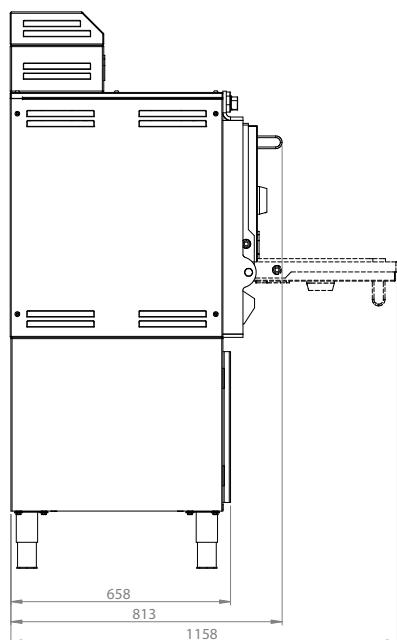Revit drawings available on request at mibrasa@mibrasa.com
Side view


* Adjustable leg height: 135-195 mm

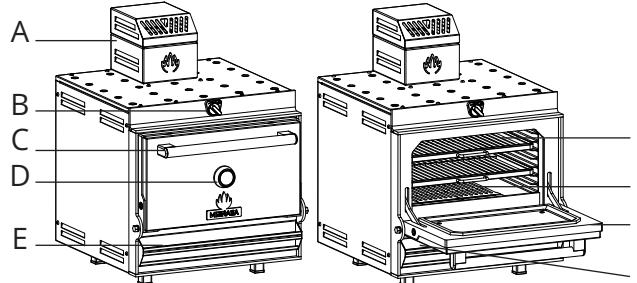

| | |
|---|------------------------------|
| A | Firebreak-dissipating filter |
| B | Upper damper |
| C | Door handle |
| D | Thermometer |
| E | Lower damper/ash collector |
| F | Grills |
| G | Charcoal grids |
| H | Door |
| I | Grease collector |

CUSTOMIZE
DOOR COLOR


BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

EDITION


GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD*

The Edition finishes are applied to the Logos, door handle and the thermometer casing.

*Only on the door handle (logos and thermometer casing in silver)

INSTALLATION GUIDELINES AND SAFETY STANDARDS

| | |
|---|---------|
| Recommended installation height | - |
| Clearances to construction/other appliances from oven | 76 mm |
| Clearances of flammable materials from oven | 300 mm |
| Clearance of workspace from front of the oven | 1100 mm |



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.