



# VERTICAL-M HMB AB 110

Mibrasa oven with lower heated cabinet



## FEATURES

### OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.

### THE VERSATILITY OF MIBRASA® CHARCOAL OVENS

We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

## TECHNICAL INFORMATION

Item	HMB AB 110
Fire up time <sup>1</sup>	45 min
Cooking temperature	482 - 662 °F / 250 - 350 °C
Initial charcoal load <sup>1</sup>	33 lb / 15 kg
Production*	220.5 lb/h / 100 kg/h
Charcoal load duration <sup>2</sup>	8 h
Equivalent power*	6.7 hp / 5 kW
Exhaust rate	1883 cfm / 3200 m <sup>3</sup> /h
Net weight <sup>3</sup>	1087 lb / 493 kg
Crated weight	1257 lb / 570 kg
Crate dimensions (WxDxH)	35.83 x 43.3 x 74.8 in / 910 x 1100 x 1900 mm

\*Approximate data


1. Consult instruction manual
2. Will vary depending on quality of charcoal
3. Weight with accessories included

### PAX PER SERVICE\*



110-130

### GRILL DIMENSION



## INCLUDED ACCESSORIES

- Grill [2] [GT110]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Firebreak-dissipating filter [FB-DF]
- Poker [PK110]
- Grill brush [CEP]

## RECOMMENDED ACCESSORIES

- Gastornorm rack [SGNAB]
- Removable grease collector [REG3/4]
- Consult catalogue for kitchenware and grillware


### QUALITY GUARANTEE



Rev. 12/24




Mibrasa® USA Corporation  
8950 SW 74th Ct, Suite 1406 Miami,  
Florida 33156, US  
408-348-7607 [usa@mibrasa.com](mailto:usa@mibrasa.com)  
[www.usa.mibrasa.com](http://www.usa.mibrasa.com)

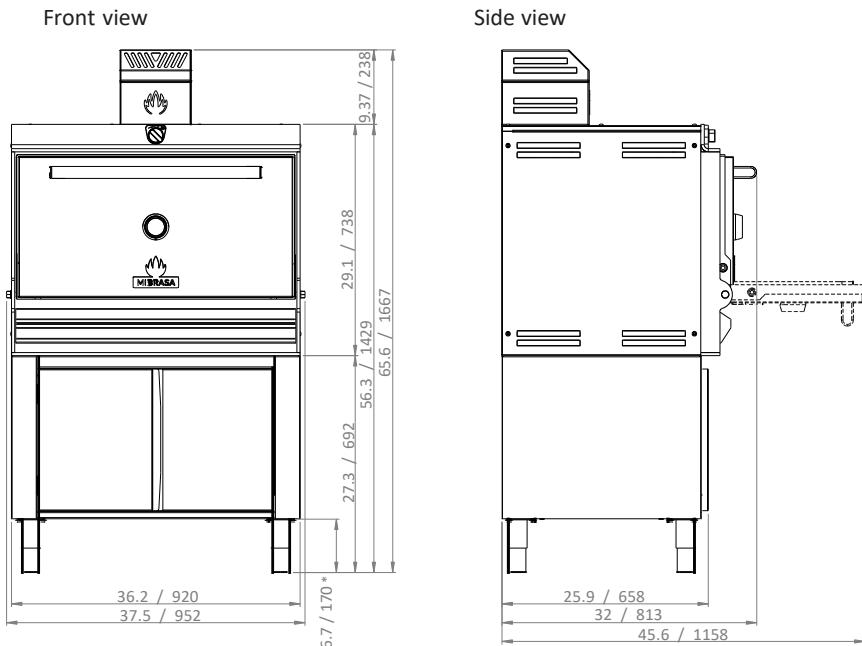

Dimensions in in / mm

Revit drawings available on request at [usa@mibrasa.com](mailto:usa@mibrasa.com)

\* Adjustable leg height: 5.3–7.7in/135–195 mm

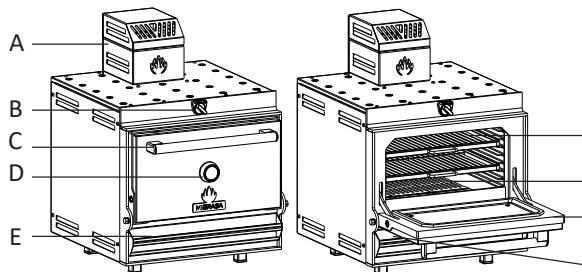

A	Firebreak-dissipating filter
B	Upper damper
C	Door handle
D	Thermometer
E	Lower damper/ash collector
F	Grills
G	Charcoal grids
H	Door
I	Grease collector

### CUSTOMIZE

#### DOOR COLOR



BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

#### EDITION



GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD\*

The Edition finishes are applied to the Logos, door handle and the thermometer casing.

\*Only on the door handle (logos and thermometer casing in silver)

### INSTALLATION GUIDELINES AND SAFETY STANDARDS

Recommended installation height	-
Clearances to construction / other appliances from oven	3 in / 76 mm
Clearances of flammable materials from oven	12 in / 300 mm
Clearance of workspace from front of the oven	44 in / 1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.