



BASE SPACE-S HMB MA SB 75

Mibrasa oven with stand and heating rack



TECHNICAL INFORMATION

Item	HMB MA SB 75
Fire up time ¹	45 min
Cooking temperature	482 – 662 °F / 250 – 350 °C
Initial charcoal load ¹	22 lb / 10 kg
Production*	154 lb/h / 70 kg/h
Charcoal load duration ²	7 h
Equivalent power*	4.7 hp / 3.5 kW
Exhaust rate	1648 cfm / 2800 m ³ /h
Net weight ³	823 lb / 373 kg
Crated weight	966 lb / 438 kg
Crate dimensions (WxDxH)	35.4 x 31.5 x 74.8 in / 900 x 800 x 1900 mm

*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

FEATURES

OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.


THE VERSATILITY OF MIBRASA® CHARCOAL OVENS

We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

PAX PER SERVICE*



GRILL DIMENSION



INCLUDED ACCESSORIES

- Grill [2] [GT75]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Firebreak-dissipating filter [FB-DF]
- Poker [PK75]
- Grill brush [CEP]


RECOMMENDED ACCESSORIES

- Gastornorm rack [SGNAB]
- Removable grease collector [REG1P/2]
- Consult catalogue for kitchenware and grillware

QUALITY GUARANTEE




Front view

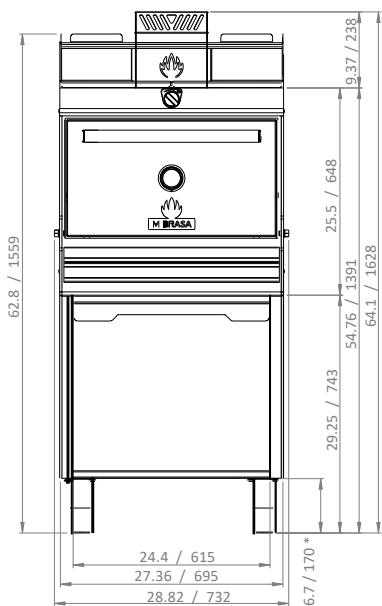


Dimensions in in / mm

Revit drawings available on request at usa@mibrasa.com

Side view

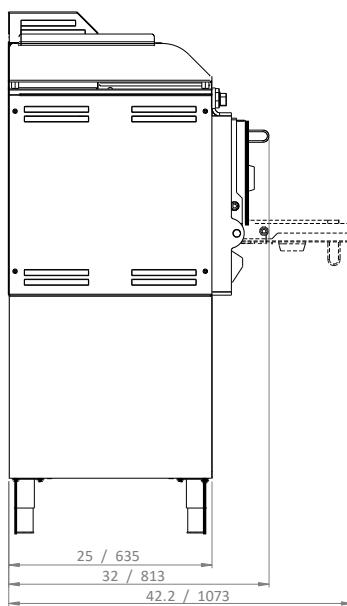

* Adjustable leg height: 5.3-7.7in / 135-195 mm

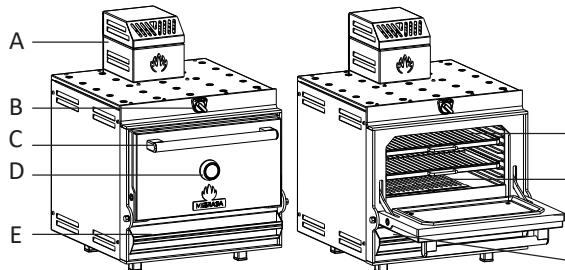


A	Firebreak-dissipating filter
B	Upper damper
C	Door handle
D	Thermometer
E	Lower damper/ash collector
F	Grills
G	Charcoal grids
H	Door
I	Grease collector

GASTORNORM CAPACITY
HEATING RACK

Compatible with Mibrasa GN.

Residual temperatures of the heating rack between 122 °F / 50 °C and 158 °F / 70 °C, based on the oven working at 572 °F / 300 °C.

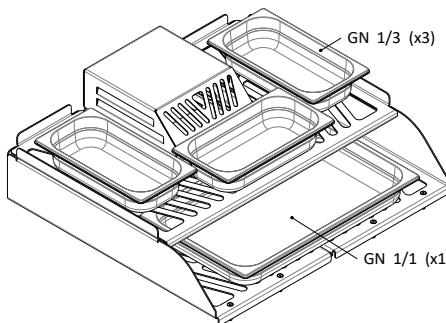
CUSTOMIZE
DOOR COLOR


BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

EDITION


GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD*

The Edition finishes are applied to the logos, door handle and the thermometer casing.

*Only on the door handle (logos and thermometer casing in silver)

INSTALLATION GUIDELINES AND SAFETY STANDARDS

Recommended installation height	-
Clearances to construction / other appliances from oven	3 in / 76 mm
Clearances of flammable materials from oven	12 in / 300 mm
Clearance of workspace from front of the oven	44 in / 1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.