



# SPACE-MINI PLUS

## HMB SB MINI PLUS

Mibrasa worktop oven with heating rack



### TECHNICAL INFORMATION

| Item                                | HMB SB MINI PLUS                              |
|-------------------------------------|---|
| Fire up time <sup>1</sup>           | 45 min  |
| Cooking temperature                 | 482 - 662 °F / 250 - 350 °C                   |
| Initial charcoal load <sup>1</sup>  | 11 lb / 5 kg                                  |
| Production*                         | 77 lb/h / 35 kg/h                             |
| Charcoal load duration <sup>2</sup> | 7 h   |
| Equivalent power*                   | 2.7 hp / 2 kW                                 |
| Exhaust rate                        | 1471 cfm / 2500 m <sup>3</sup> /h             |
| Net weight <sup>3</sup>             | 615 lb / 279 kg                               |
| Crated weight                       | 743 lb / 337 kg                               |
| Crate dimensions (WxDxH)            | 31.5 x 28.35 x 53.15 in / 800 x 720 x 1350 mm |

\*Approximate data

1. Consult instruction manual
2. Will vary depending on quality of charcoal
3. Weight with accessories included

### FEATURES

#### OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.

#### THE VERSATILITY OF MIBRASA® CHARCOAL OVENS


We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

#### PAX PER SERVICE\*



45-60

#### GRILL DIMENSION



#### INCLUDED ACCESSORIES

- Grill [2] [GTMPLUS]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Firebreak-dissipating filter [FB-DF]
- Poker [PKMPLUS]
- Grill brush [CEP]

#### RECOMMENDED ACCESSORIES

- Base trim worktop [EMBHMB160]
- Removable grease collector [REG3/4]
- Consult catalogue for kitchenware and grillware

#### QUALITY GUARANTEE




Rev. 12/24




Mibrasa® USA Corporation  
8950 SW 74th Ct, Suite 1406 Miami,  
Florida 33156, US  
408-348-7607-[usa@mibrasa.com](mailto:usa@mibrasa.com)  
[www.usa.mibrasa.com](http://www.usa.mibrasa.com)


Front view

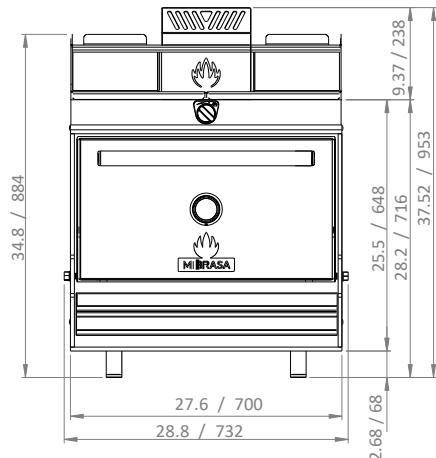

Side view

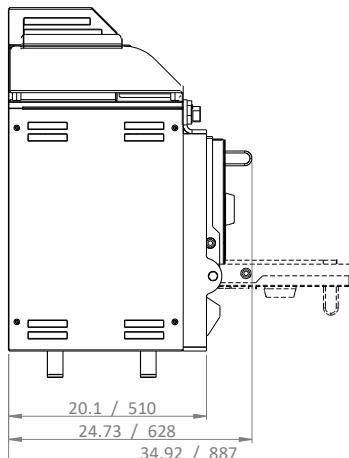

Dimensions in in / mm

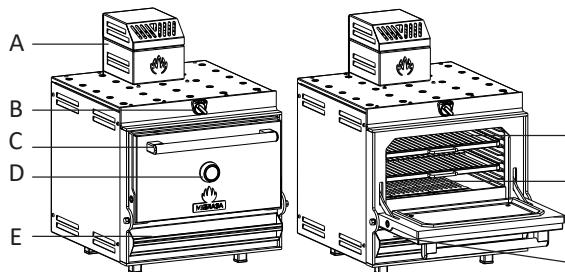 Revit drawings available on request at [usa@mibrasa.com](mailto:usa@mibrasa.com)


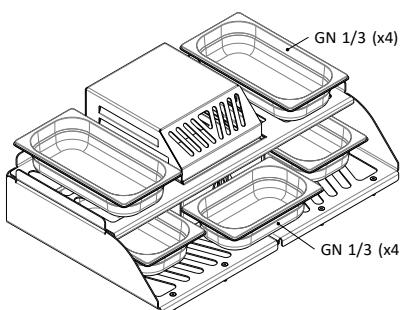
|   |                              |
|---|------------------------------|
| A | Firebreak-dissipating filter |
| B | Upper damper                 |
| C | Door handle                  |
| D | Thermometer                  |
| E | Lower damper/ash collector   |
| F | Grills                       |
| G | Charcoal grids               |
| H | Door                         |
| I | Grease collector             |

### GASTORNORM CAPACITY

#### HEATING RACK

Compatible with Mibrasa GN.

Residual temperatures of the heating rack between 122 °F / 50 °C and 158 °F / 70 °C, based on the oven working at 572 °F / 300 °C.



### INSTALLATION GUIDELINES AND SAFETY STANDARDS

|   |                 |
|---|-----------------|
| Recommended installation height                         | 28 in / 700 mm  |
| Clearances to construction / other appliances from oven | 3 in / 76 mm    |
| Clearances of flammable materials from oven             | 12 in / 300 mm  |
| Clearance of workspace from front of the oven           | 44 in / 1100 mm |



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.