



COMPACT-MINI

Mibrasa worktop oven



TECHNICAL INFORMATION

| Reference | HMB MINI |
|-------------------------------------|------------------------|
| Fire up time ¹ | 45 min |
| Cooking temperature | 250 - 350 °C |
| Initial charcoal load ¹ | 5 kg |
| Production* | 25 kg/h |
| Charcoal load duration ² | 7 h |
| Equivalent power* | 2 kW |
| Exhaust rate | 2500 m ³ /h |
| Net weight ³ | 222 kg |
| Crated weight ³ | 280 kg |
| Crate dimensions (WxDxH) | 800 x 720 x 1350 mm |

*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

FEATURES

OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.


THE VERSATILITY OF MIBRASA® CHARCOAL OVENS

We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

PAX PER SERVICE*



GRILL DIMENSION



INCLUDED ACCESSORIES

- Firebreak-dissipating filter [FB-DF]
- Grill [GTMINI]
- Ash shovel [PALA]
- Poker [PKM]
- Mibrasa tongs [TG]
- Grill brush [CEP]


RECOMMENDED ACCESSORIES

- Extra grill [GTM]
- Removable grease collector [REG1]
- Base trim worktop [EMBHMBMINI]
- Consult catalogue for kitchenware and grillware


QUALITY GUARANTEE



Front view

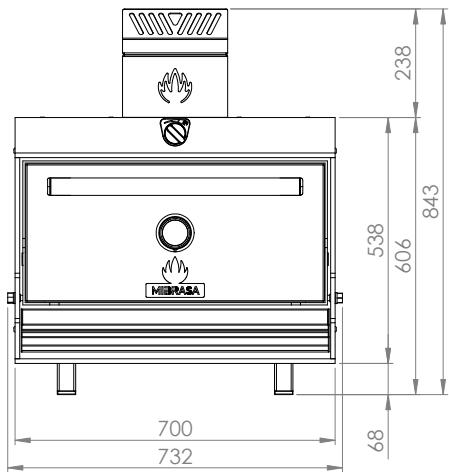


Side view

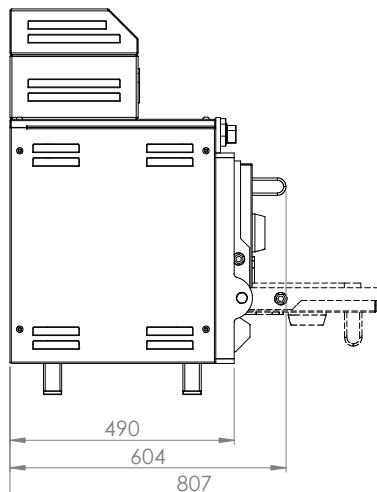

Dimensions in mm

Revit drawings available on request at mibrasa@mibrasa.com

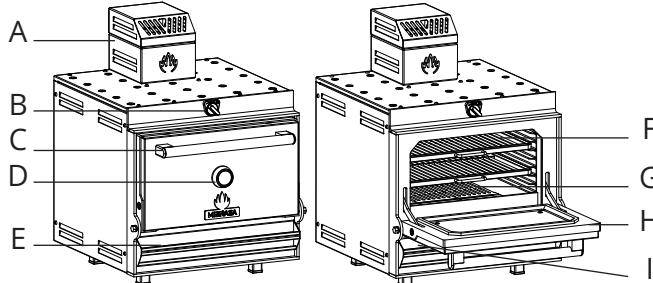

| | |
|---|------------------------------|
| A | Firebreak-dissipating filter |
| B | Upper damper |
| C | Door handle |
| D | Thermometer |
| E | Lower damper/ash collector |
| F | Grills |
| G | Charcoal grids |
| H | Door |
| I | Grease collector |

CUSTOMIZE

DOOR COLOR



BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

EDITION



GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD*

The Edition finishes are applied to the logos, door handle and the thermometer casing.

*Only on the door handle (logos and thermometer casing in silver)

INSTALLATION GUIDELINES AND SAFETY STANDARDS

| | |
|---|---------|
| Recommended installation height | 700 mm |
| Clearances to construction/other appliances from oven | 76 mm |
| Clearances of flammable materials from oven | 300 mm |
| Clearance of workspace from front of the oven | 1100 mm |



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.