



# COMPACT-MINI PLUS

## HMB MINI PLUS

Mibrasa worktop oven



### TECHNICAL INFORMATION

Item	HMB MINI PLUS
Fire up time <sup>1</sup>	45 min
Cooking temperature	482 – 662 °F / 250 - 350 °C
Initial charcoal load <sup>1</sup>	11 lb / 5 kg
Production*	77 lb/h / 35 kg/h
Charcoal load duration <sup>2</sup>	7 h
Equivalent power*	2,7 hp / 2 kW
Exhaust rate	1472 cfm / 2501 m <sup>3</sup> /h
Net weight <sup>3</sup>	591 lb / 268 kg
Crated weight	719 lb / 326 kg
Crate dimensions (WxDxH)	31.9 x 28.74 x 52.36 in / 810 x 730 x 1330 mm

\*Approximate data

1. Consult instruction manual
2. Will vary depending on quality of charcoal
3. Weight with accessories included

### FEATURES

#### OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.

#### THE VERSATILITY OF MIBRASA® CHARCOAL OVENS


We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

#### PAX PER SERVICE\*



45-60

#### GRILL DIMENSION



#### INCLUDED ACCESSORIES

- Grill [2] [GTMPLUS]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Firebreak-dissipating filter [FB-DF]
- Poker [PKMPLUS]
- Grill brush [CEP]

#### RECOMMENDED ACCESSORIES

- Removable grease collector [REG1P/2]
- Base trim worktop [EMBHMBMINP]
- Consult catalogue for kitchenware and grillware

#### QUALITY GUARANTEE




Rev.12/24




Mibrasa® USA Corporation  
8950 SW 74th Ct, Suite 1406 Miami,  
Florida 33156, US  
408-348-7607- [usa@mibrasa.com](mailto:usa@mibrasa.com)  
[www.usa.mibrasa.com](http://www.usa.mibrasa.com)


Front view

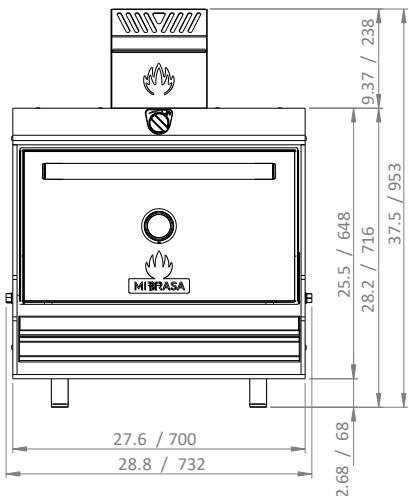

Side view

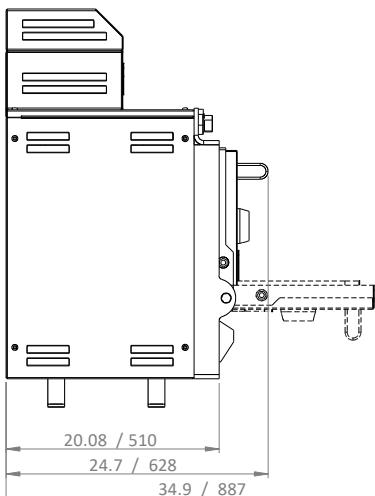

Dimensions in in / mm

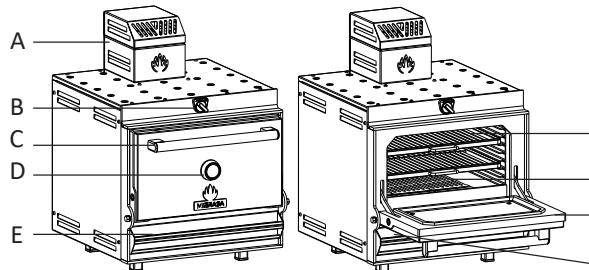Revit drawings available on request at [usa@mibrasa.com](mailto:usa@mibrasa.com)


A	Firebreak-dissipating filter
B	Upper damper
C	Door handle
D	Thermometer
E	Lower damper/ash collector
F	Grills
G	Charcoal grids
H	Door
I	Grease collector

**CUSTOMIZE**
**DOOR COLOR**


BLACK



RED



YELLOW



STAINLESS STEEL



BLUE

**EDITION**


GOLD



BLACK



COPPER



TITANIUM



SILVER



WOOD\*

The Edition finishes are applied to the logos, door handle and the thermometer casing.

\*Only on the door handle (logos and thermometer casing in silver)

**INSTALLATION GUIDELINES AND SAFETY STANDARDS**

Recommended installation height	28 in / 700 mm
Clearances to construction / other appliances from oven	3 in / 76 mm
Clearances of flammable materials from oven	12 in / 300 mm
Clearance of workspace from front of the oven	44 in / 1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.