




# DOUBLE 160

Mibrasa® Parrilla with two grills

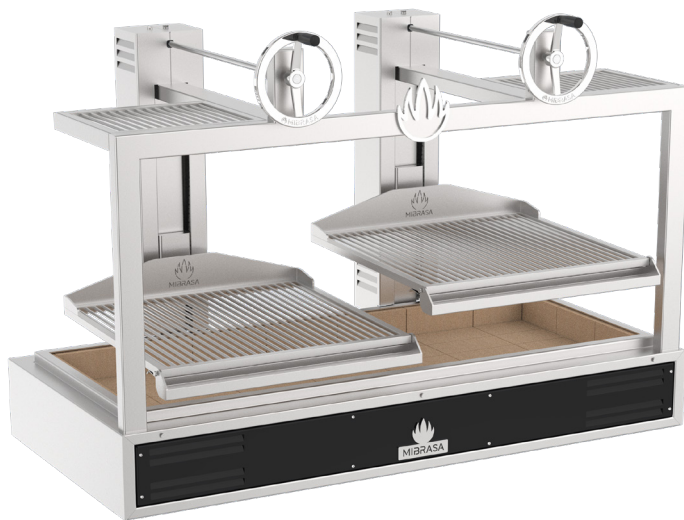

## FEATURES

Precision and strength is key to the PARRILLA MIBRASA®. Effortlessly regulate the height of your grill surface thanks to the carefully engineered double chain system coupled with the crank wheel and gearbox, keeping maintenance down to a minimum.

ERGONOMICALLY DESIGNED WITH MAXIMUM QUALITY AND SECURITY

With a sloping grill, the grease runs down the weld-free grill bars to prevent grease build-up. Grease drips down to the collector with an easy to remove mechanism ready to clean.

The base is lined with refractory bricks to ensure maximum heat efficiency and resistance to pure fire. And the built-in cooling system in outer case guarantees a maximum level of security.

Built using quality steels providing strength and durability; ergonomically designed for practicality and ease of use, each feature plays a crucial part in delivering the ultimate grilling machine for every chef.

## TECHNICAL INFORMATION

| Reference                           | GMB 160               |
|-------------------------------------|-----------------------|
| Fire up time*                       | 30 min                |
| Cooking temperature                 | 250 °C                |
| Grill height range                  | 350 mm                |
| Initial charcoal load <sup>1</sup>  | 15 kg                 |
| Charcoal load duration <sup>2</sup> | 5 h                   |
| Equivalent power*                   | 5.2 kW                |
| Exhaust rate                        | 4600 m³/h             |
| Net weight <sup>3</sup>             | 395 kg                |
| Crated weight <sup>3</sup>          | 525 kg                |
| Crate dimensions (WxDxH)            | 1120 x 1810 x 1380 mm |

\*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

## INCLUDED ACCESSORIES

- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Ember poker [PK]
- Grill brush [CEP]
- 2 rod grills [CPV-160]

## OPTIONAL ACCESSORIES

- V-shape grill [GV-160]
- End of service lid [TAPA65]
- Vertical cooking rack (CPH-160)
- Protective structure [EPGMB160]
- Espeto kit [KITESPGMB160]
- Gastronorm kit [SGN160]

## Color



Black



Blue



Red



Stainless steel



Yellow

## Edition



Gold



Black



Copper



Titanium



Silver

## QUALITY GUARANTEE



Rev. 11/25

Mibrasa® Charcoal Ovens S.L.


C/Juan Rovira i Bastons, 26

17230 Palamós - Spain


+34 972 601 942 - mibrasa@mibrasa.com

www.mibrasa.com


Front view

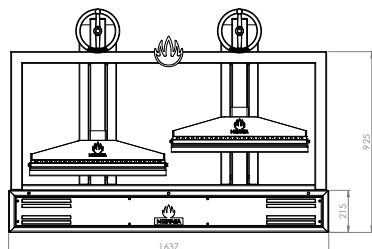


Side view



Top view




Dimensions in mm

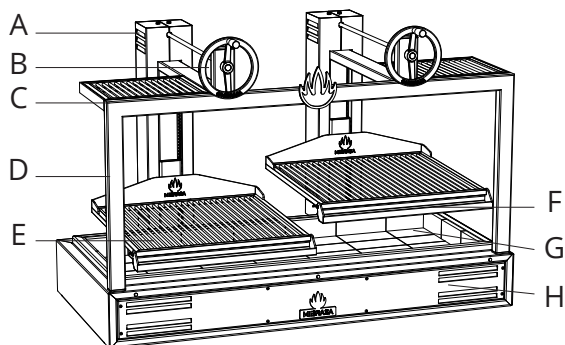


|   |                   |
|---|-------------------|
| A | Elevating system  |
| B | Elevating wheel   |
| C | Heating rack      |
| D | Structure         |
| E | Grill             |
| F | Grease collector  |
| G | Refractory bricks |
| H | Main body         |

## GRILL TYPES


Rod bar grill




V shape grill




## GRILL DIMENSIONS

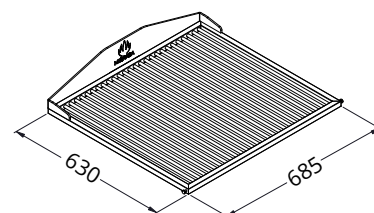

## HEATING RACK DIMENSION



## OPTIONAL LID DIMENSION



## INSTALLATION GUIDELINES AND SAFETY STANDARDS

|                                                               |        |
|---------------------------------------------------------------|--------|
| Recommended installation height                               | 700 mm |
| Clearances to construction/other appliances from the Parrilla | 76 mm  |
| Clearances of flammable materials from the Parrilla           | 300 mm |
| Clearance of workspace from front of the Parrilla             | 700 mm |



It is recommended to use a lifting device to lift the Parrilla and place on the countertop/stand. Consult Parrilla instruction manual for further information.

Specifications and design are subject to change without notice.

## OPTIONAL COMPLETE STAND



## TECHNICAL INFORMATION

|                            |                      |
|----------------------------|----------------------|
| Ref.                       | GMB160 + MCGMB160    |
| Net weight <sup>3</sup>    | 505 kg               |
| Crated weight <sup>3</sup> | 635 kg               |
| Crate dimensions (WxDxH)   | 1120 x 1510 x 2000mm |


|                            |                     |
|----------------------------|---------------------|
| Ref.                       | MCGMB160            |
| Net weight <sup>3</sup>    | 110 kg              |
| Crated weight <sup>3</sup> | 125 kg              |
| Crate dimensions (WxDxH)   | 1120 x 1510 x 700mm |

## OPTIONAL ACCESSORIES


- Stainless steel casters [WINOXG]

Dimensions in mm

FRONT VIEW

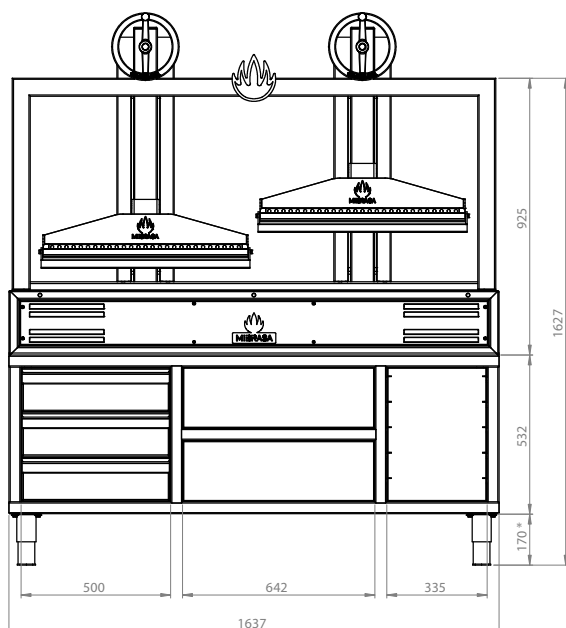

SIDE VIEW

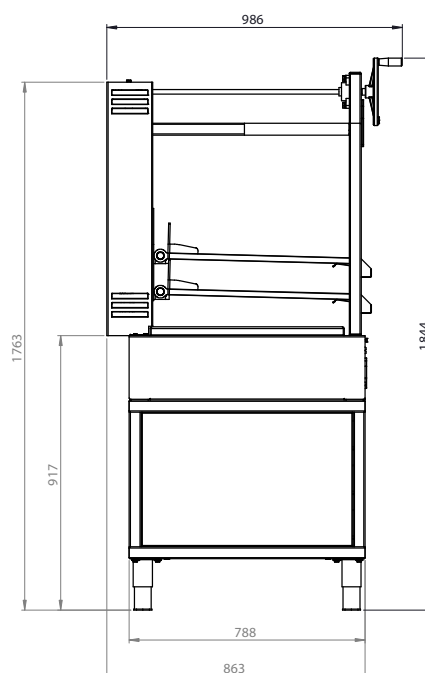

\*Adjustable leg height 135-195 mm



## OPTIONAL STAND



## TECHNICAL INFORMATION

|                            |                       |
|----------------------------|-----------------------|
| Ref.                       | GMB160 + MAGMB160     |
| Net weight <sup>3</sup>    | 455 kg                |
| Crated weight <sup>3</sup> | 585 kg                |
| Crate dimensions (WxDxH)   | 1120 x 1510 x 2000 mm |


|                            |                      |
|----------------------------|----------------------|
| Ref.                       | MAGMB160             |
| Net weight <sup>3</sup>    | 60 kg                |
| Crated weight <sup>3</sup> | 75 kg                |
| Crate dimensions (WxDxH)   | 1120 x 1510 x 700 mm |

## OPTIONAL ACCESSORIES


- Stainless steel casters [WINOXG]

Dimensions in mm

FRONT VIEW

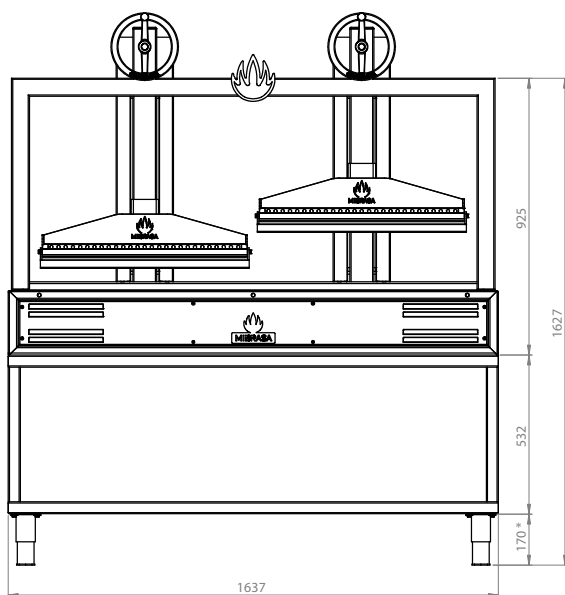

SIDE VIEW

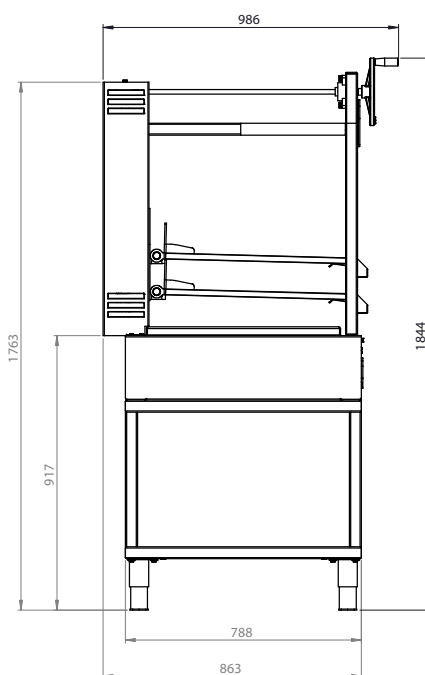

\*Adjustable leg height 135-195 mm