ltem#



US SINGLE + COMPACT-M

Parrilla Single + Mibrasa Oven



FEATURES

The Mibrasa DUO is an integral solution for restaurants that want to maximize their cooking production with the best possible execution and result.

In one sole unit, the DUO is made up of two Mibrasa grilling machines: Charcoal oven and Parrilla; a synergy that guarantees chefs absolute control through an agile workspace that in turn speeds up cooking processes.

Each Mibrasa grilling machine features unique characteristics that enable different cooking processes. This combination allows us to work with all simultaneously and as a result maximizes the capacity forcreation.

INCLUDED ACCESSORIES

Oven Compact-M (HMB 110)

- Grill/s [GT110]
- Firebreak-dissipating filter [FB-DF]
- Mibrasa tongs [TG]
- Grill brush [CEP]
- Ash shovel [PALA]
- Poker [PK110]

Parrilla Single (GMB 100)

- Rod grill [CPV-100 200]
- Ember [PK160]
- Mibrasa tongs [TG]
- Grill brush [CEP]
- Ash shovel [PALA]

RECOMENDED ACCESSORIES

- Espero kit [KITESPGMB100]
- Gastronorm kit [SGN100]
- Spiedo GMB 100 DUO [SPIEDO100-DUO]

Ref. DUOGMB100_HMB110

TECHNICAL INFORMATION	Parrilla Single (GMB 100)	Oven Compact-M (HMB 110)		
Fire up time*	30 min-average	45 min-average		
Cooking temperature	250 °C	250 - 350 °C		
Covers per service*	NA	110 - 130		
Cooking surface area	890 x 630 mm	755 x 595 mm		
Grill height range	350 mm	NA		
Initial charcoal load ¹	10 kg	15 kg		
Charcoal load duration ²	5 h	8 h		
Equivalent power*	4,5 kW	5 kW		
Exhaust rate	4100 m3/h	3200 m3/h		
Net weight	828 kg			
Crated weight	1009 kg			
Crated dimensions (WxDxH)	2230 x 1060 x 2000 mm			

*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal


SURFACE DIMENSIONS

Oven grill (x2)



Parrilla heating rack (x2)








Mibrasa® Charcoal Ovens S.L C/Joan Rovira i Bastons, 26 17230 Palamós - Spain +34 972 601 942 - mibrasa@mibrasa.com www.mibrasa.com



SINGLE + COMPACT-M

Parrilla Single + Mibrasa Oven

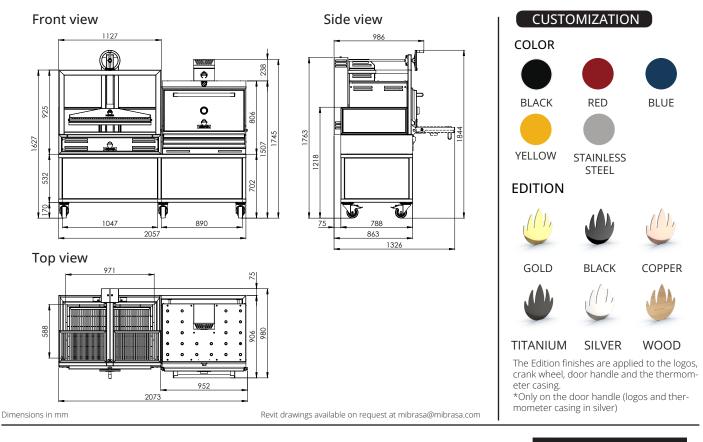

PARRILLA MIBRASA		OVEN MIBRASA
Elevating system	L	Firebreak-dissipating filter
Elevating wheel	М	Regulador tiro superior
Heating rack	Ν	Upper damper
) Structure	0	Thermometer
Protective structure	Р	Removable grease collector
Grill	0	Lower damper/ash
Grease collector		collector
Refractory bricks	R	Trim base worktop
Main body	s	Grills
Stand	т	Charcoal grids
Swivel casters	U	Door

SAFETY STANDARDS AND INSTALLATION GUIDELINES

Clearances to construction/other appliances from the DUO	
Clearances of flammable materials from the DUO	
Clearance of workspace from front of the DUO	1100 mm

Specifications and design are subject to change without notice.

А В С D Е F

G Н I J Κ