

SINGLE + COMPACT-L

MIBRASA

Parrilla Single + Mibrasa Oven



Ref. DUOGMB100_HMB160

| TECHNICAL INFORMATION | Parrilla Single (GMB 100) | Oven Compact-L (HMB 160) | |
|-------------------------------------|------------------------------|-----------------------------|--|
| Fire up time* | 30 min-average | 45 min-average | |
| Cooking temperature | 250 °C | 250 - 350 °C | |
| Covers per service* | NA | 160 - 190 | |
| Cooking surface area | 890 x 630 mm | 755 x 795 mm | |
| Grill height range | 350 mm | NA | |
| Initial charcoal load ¹ | 10 kg | 18 kg 8 h 6 kW | |
| Charcoal load duration ² | 5 h | | |
| Equivalent power* | 4,5 kW | | |
| Exhaust rate | 4100 m3/h | 3500 m3/h | |
| Net weight | 926 kg | | |
| Crated weight | 1107 kg | | |
| Crated dimensions (WxDxH) | 2230 x 1100 x 2000 mm | | |

*Approximate data 1. Consult instruction manual 2. Will vary depending on quality of charcoal


SURFACE DIMENSIONS

Oven grill (x2)

QUALITY GUARANTEE

Rev. 5/25

Parrilla grill

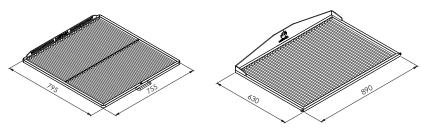

FEATURES

The Mibrasa DUO is an integral solution for restaurants that want to maximize their cooking production with the best possible execution and result.

In one sole unit, the DUO is made up of two Mibrasa grilling machines: Charcoal oven and Parrilla; a synergy that guarantees chefs absolute control through an agile workspace that in turn speeds up cooking processes.

Each Mibrasa grilling machine features unique characteristics that enable different cooking processes. This combination allows us to work with all simultaneously and as a result maximizes the capacity for creation.

INCLUDED ACCESSORIES

Oven Compact-L (HMB 160)

- Grill/s [GT160] •
- Firebreak-dissipating filter [FB-DF]
- Mibrasa tongs [TG] •
- Grill brush [CEP]
- Ash shovel [PALA]
- Poker [PK160]


Parrilla Single (GMB 100)

- Rod grill [CPV-100_200] .
- Ember [PK]
- Mibrasa tongs [TG]
- Grill brush [CEP]
- Ash shovel [PALA]

RECOMMENDED ACCESSORIES

- Espeto kit [KITESPGMB100] .
- Gastronorm kit [SGN100]
- Spiedo GMB 100 DUO [SPIEDO100-DUO]

Parrilla heating rack (x2)




(س)

Mibrasa® Charcoal Ovens S.L C/Joan Rovira i Bastons, 26 17230 Palamós - Spain +34 972 601 942 - mibrasa@mibrasa.com www.mibrasa.com



SINGLE + COMPACT-L Parrilla Single + Mibrasa Oven

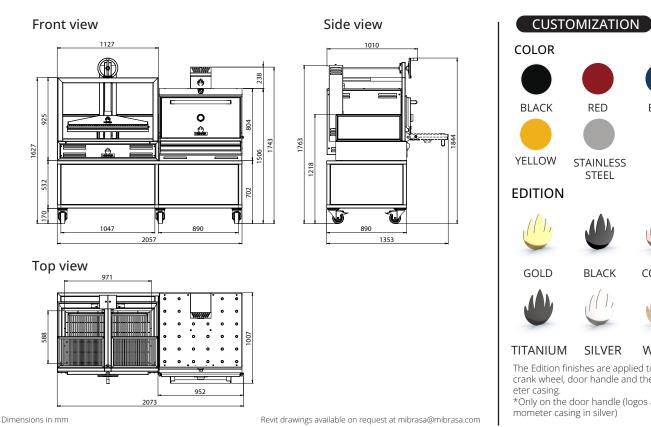

 \sim

 \sim

| YEL | LOW | STAINLESS STEEL | | | | |
|----------------------|-----------------|--|-------------------------------------|--|--|--|
| EDI | τιο | N | | | | |
| | ſ, | | | | | |
| GOLD | | BLACK | COPPER | | | |
| | | | | | | |
| TITANIUM SILVER WOOD | | | | | | |
| The I cran | Editio k whe | n finishes are appl el, door handle an | lied to the logos Id the thermom | | | |
| *Onl | | g. the door handle (lo casing in silver) | ogos and ther- | | | |
| | | | | | | |
| L | | OVEN MIB | RASA | | | |
| | L | Firebreak-dissipating filter | | | | |
| M N | М | Upper damper | | | | |
| _ | Ν | Door handle | | | | |
| 0 | 0 | Thermometer | | | | |
| Ρ | Р | Removable grease collector | | | | |
| Q | Q | Lower damper/ash collector | | | | |
| R | R | Trim base worktop | | | | |
| | | | | | | |

Grills

Door

Charcoal grids

S

Т U RED

BLUE

| | PARRILLA MIBRASA | A | | |
|---|----------------------|-------|--|----------|
| А | Elevating system | | | |
| В | Elevating wheel | | li m | |
| С | Heating rack | | | <u> </u> |
| D | Structure | F - K | | |
| Е | Protective structure | G | | |
| F | Grill | | | |
| G | Grease collector | | | |
| Н | Refractory bricks | | | |
| I | Main body | | | |
| J | Stand | | | |
| К | Swivel casters | | La construction de la constructi | |

SAFETY STANDARDS AND INSTALLATION GUIDELINES

| Clearances to construction/other appliances from the DUO | |
|--|---------|
| Clearances of flammable materials from the DUO | |
| Clearance of workspace from front of the DUO | 1100 mm |

Specifications and design are subject to change without notice.

Mibrasa[®] Charcoal Ovens S.L C/Joan Rovira i Bastons, 26 17230 Palamós - Spain +34 972 601 942 - mibrasa@mibrasa.com www.mibrasa.com