



# SPACE - NANO

Mibrasa worktop oven with heating rack



## TECHNICAL INFORMATION

Reference	HMBSB 35
Fire up time <sup>1</sup>	25 min
Cooking temperature	250 - 350 °C
Initial charcoal load <sup>1</sup>	3 kg
Production*	20 kg/h
Charcoal load duration <sup>2</sup>	6 h
Equivalent power*	1.5 kW
Exhaust rate	2000 m <sup>3</sup> /h
Net weight <sup>3</sup>	164 kg
Crated weight	216 kg
Crate dimensions (WxDxH)	600 x 700 x 1000 mm

\*Approximate data

1. Consult instruction manual 2. Will vary depending on quality of charcoal 3. Weight with accessories included

## FEATURES

### OUR CHARCOAL OVENS

The Mibrasa® oven is a closed grill designed and engineered in our workshops. Made from the best quality steel by expert hands, our grills are designed to satisfy even the most demanding chefs.

The technical specifications allow the user to accurately control the air flow through the grill, changing the intensity of the embers. This is an extremely efficient way of cooking and cuts down the amount of charcoal needed.

Mibrasa® charcoal ovens allow you to cook all types of foods retaining the natural flavors and bringing out a unique taste.


### THE VERSATILITY OF MIBRASA® CHARCOAL OVENS

We have a wide range of high quality products and accessories allowing you to completely personalize your Mibrasa® charcoal oven, adapting it to your needs.

### PAX PER SERVICE\*



### GRILL DIMENSION

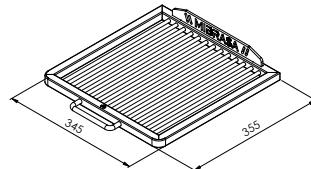

### INCLUDED ACCESSORIES



- Grill [GT35]
- Firebreak-dissipating filter [FB-DF-S]
- Mibrasa tongs [TG]
- Ash shovel [PALA]
- Poker [PKM]
- Grill brush [CEP]
- Removable grease collector [REG1]

### RECOMMENDED ACCESSORIES


- Extra grill [GT35]
- Consult catalogue for kitchenware and grillware

### QUALITY GUARANTEE

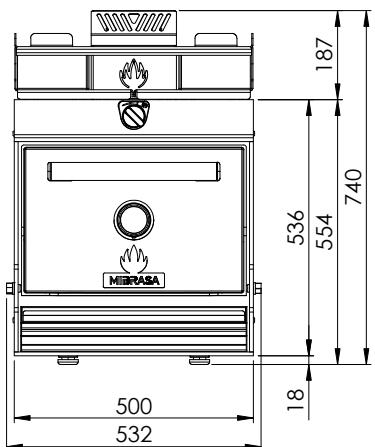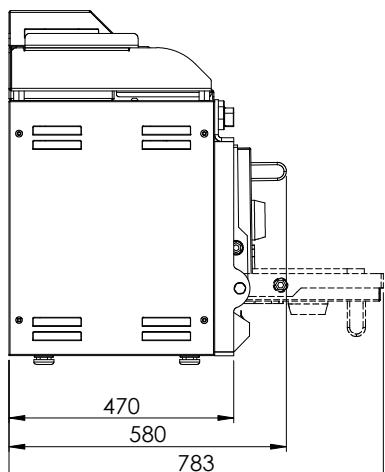

**Front view**

**Side view**

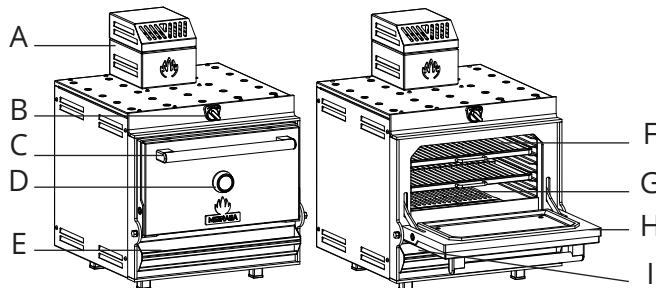
Dimensions in mm

Revit drawings available on request at [mibrasa@mibrasa.com](mailto:mibrasa@mibrasa.com)


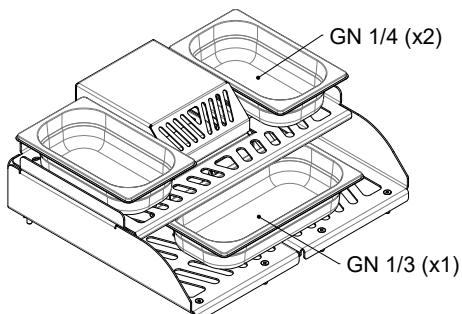
A	Firebreak-dissipating filter
B	Upper damper
C	Door handle
D	Thermometer
E	Lower damper/ash collector
F	Grills
G	Charcoal grids
H	Door
I	Grease collector

### GASTORNORM CAPACITY

#### HEATING RACK

Compatible with Mibrasa GN.

Residual temperatures of the heating rack between 50°C and 70°C, based on the oven working at 300°C.



Recommended installation height	900 mm
Clearances to construction/other appliances from oven	76 mm
Clearances of flammable materials from oven	300 mm
Clearance of workspace from front of the oven	1100 mm



It is recommended to use a lifting device to lift the oven and place on the countertop/cabinet. Consult oven instruction manual for further information.

Specifications and design are subject to change without notice.